Installation Manual for Toilet Seat and Cover

NB: This Installation manual is for the installer and must be followed in order for the seat to be fitted and work correctly.

Before beginning the installation of the seat, please check to make sure you have all of the seat components (1-6) shown below.

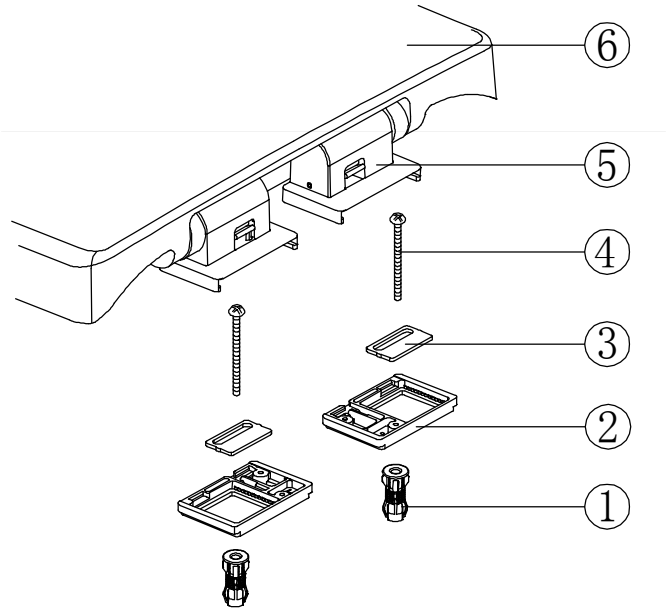

①	Hinge Anchor	④	Screw
②	Fixed Block	⑤	Hinge
③	Adjusting Piece	⑥	Toilet Seat & Cover

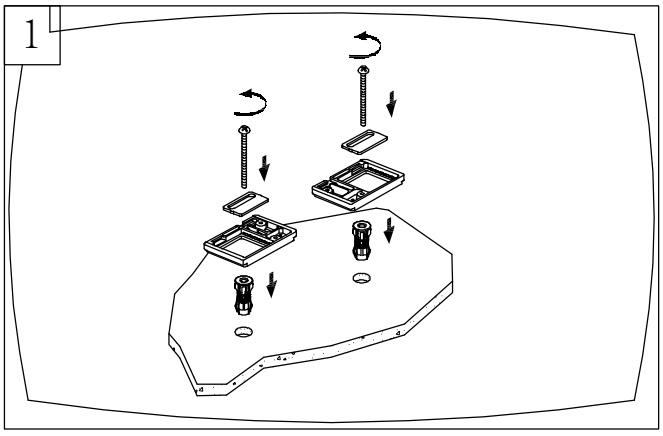

1. Insert adjusting piece (3) into slot of fixed block (2) and insert screw (4) into same slot.
2. Push expansion bolt (1) in through top of seat holes in WC Pan.
3. Screw the fixed block (2) into the expansion Bolt (1) and tighten.

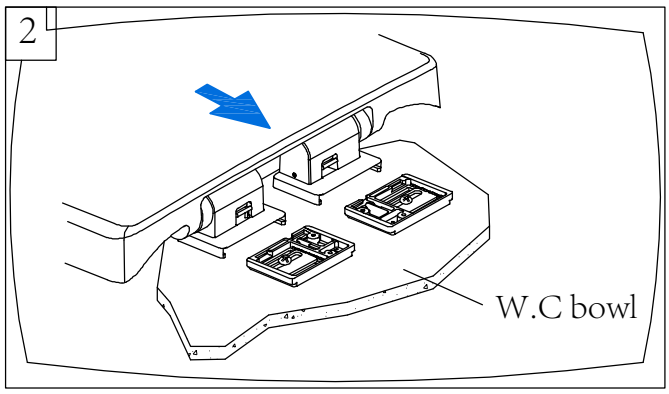

To fit the seat, slide the seat hinge over the fixed block until the hinge clicks.

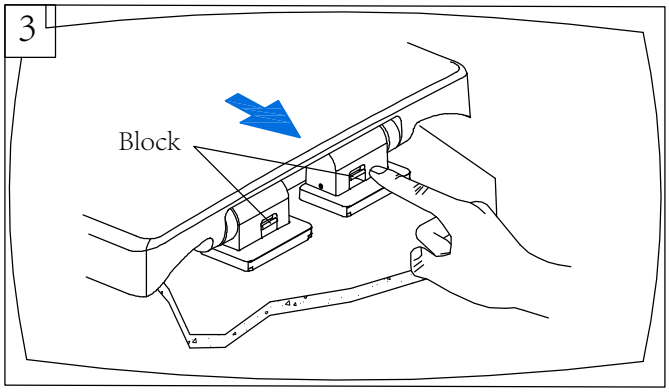

To remove the toilet seat press the two buttons on the back of the seat hinge and slide the seat forward.

Note:

Please contact your branch of purchase if any parts are missing

DO NOT use sharp or coarse materials or any corrosive products to clean the seat.